


JB Deep Cycle 12V 40 Ah 43701010002

Deep Cycle Gel Valve Regulated Lead Acid Battery

DG (Deep Cycle GEL) series is pure GEL battery with 20 years floating design life, it is ideal for standby or frequent cyclic discharge applications under extreme environments. By using strong grids, high purity lead and patented Gel electrolyte, the DG series offers excellent recovery capability after deep discharge under frequent cyclic discharge use, and can deliver 450 cycles at 100% DOD.

Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	40Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 13.2 Kg (Tolerance ±3.0%)
Internal Resistance	Approx. 11 mΩ
Terminal	F4(M6) / F11(M6)
Max. Discharge Current	400A (5 sec)
Design Life	15 years (floating charge)
Maximum Charging Current	8.0 A
Reference Capacity	C3: 27.3AH C5: 31.5AH C10: 35.1AH C20: 40.0AH
Float Charging Voltage	13.6V ~ 13.8V @25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.2V ~ 14.4V @25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -40°C~60°C Charge: -20°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C ± 5°C
Self Discharge	Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional

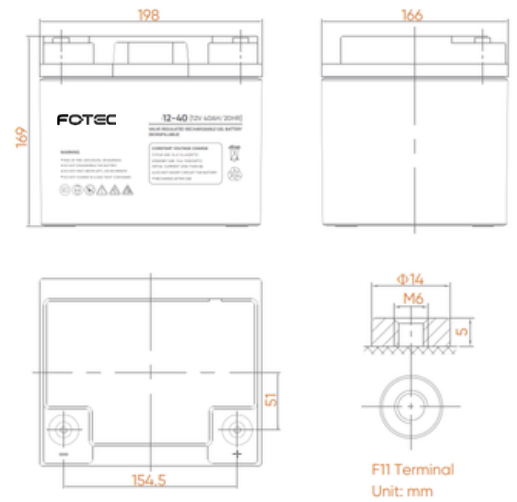

Length
198±2mm (7.80 inches)

Width
166±2mm (6.54 inches)

Height
169±2mm (6.65 inches)

Total Height
169±2mm (6.65 inches)

Terminal M5 Value
6-7 N*m

Terminal M6 Value
8-10 N*m

Terminal M8 Value
10-12 N*m


Constant Current Discharge Characteristics: A (25°C)

F.V./Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	74.14	58.02	38.15	22.36	13.37	9.23	7.65	6.44	4.40	3.65	2.20
1.65V	70.54	56.83	37.52	22.26	13.27	9.20	7.61	6.40	4.36	3.61	2.12
1.70V	68.05	55.93	37.19	22.05	13.17	9.13	7.58	6.36	4.33	3.58	2.06
1.75V	63.55	53.88	37.27	21.84	13.07	9.09	7.51	6.29	4.29	3.54	2.00
1.80V	58.63	50.25	36.98	21.33	12.84	8.84	7.33	6.17	4.22	3.51	1.88
1.85V	53.01	45.59	34.96	20.26	12.27	8.46	6.98	5.91	4.04	3.40	1.80


Constant Power Discharge Characteristics : WPC (25°C)

F.V./Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	132	105	71.3	43.1	26.3	18.3	15.2	12.8	8.75	7.27	3.89
1.65V	128	104	70.5	43.0	26.1	18.3	15.2	12.8	8.71	7.22	3.82
1.70V	124	103	70.7	42.6	26.0	18.2	15.1	12.7	8.65	7.16	3.75
1.75V	117	99	70.9	42.2	25.8	18.2	15.0	12.6	8.58	7.09	3.68
1.80V	109	92.5	70.5	41.5	25.5	17.7	14.7	12.3	8.44	7.02	3.61
1.85V	99.8	84.3	67.0	39.7	24.5	16.9	14.0	11.8	8.08	6.81	3.40


Discharge Characteristics Curve

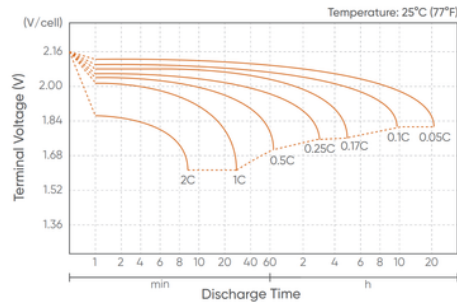


Charge Characteristic Curve for Cycle Use (IU)

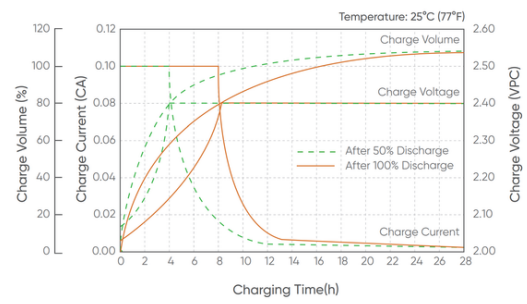


Discharge Characteristics Curve

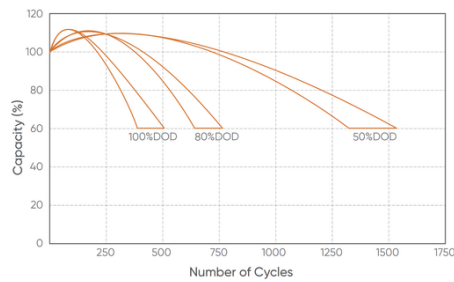


Charge Characteristic Curve for Cycle Use (IU)

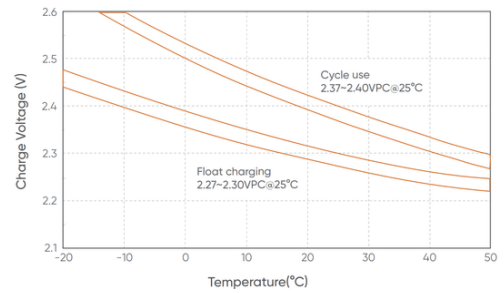


Discharge Characteristics Curve

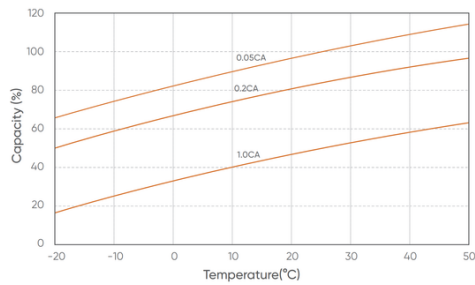


Charge Characteristic Curve for Cycle Use (IU)

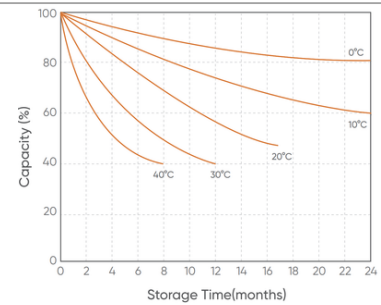

Discharge Characteristics Curve

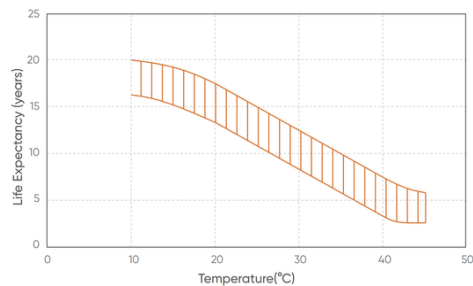

Charge Characteristic Curve for Cycle Use (IU)

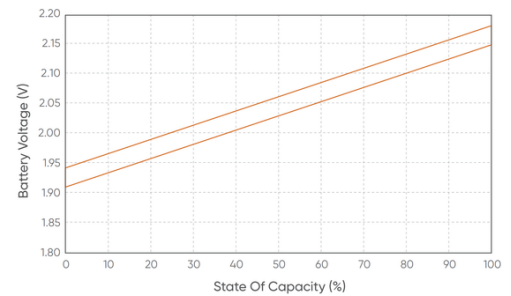

PRODUCT AND PRODUCTION FACILITY CERTIFICATES



- EN IEC 61000-6-3:2021
- EN IEC 61000-6-1:2019
- EN 61000-3-32:13+A2:2021+AC:2022
- EN IEC 61000-3-2:2019+A1:2021

- TS 10002:2018
- TS EN ISO 14001:2015
- TS EN ISO 9001:2015
- TS ISO/IEC 20000-1:2013
- TS ISO 45001:2018
- TSS0001:2018 GREEN IT
- TS180001:2007 - OHSAS 18001



Please read the safety and installation instructions.
Visit www.fotec.com.tr
You can request the printed version.

Note: Technical data is subject to change without prior notice. Please ask FOTEC for the latest data sheets before using FOTEC products. FOTEC is not responsible for any damage to devices equipped with FOTEC products based on unverified information. Specifications in this data sheet are subject to change without prior notice. Not all features may be available in all markets. Fotec, Fotec PV™, Fotec EV™, Fotec MaXimus Cell™, Fotec RaiseUP™, Fotec Power Scada™ are all registered trademarks of Fotec Energy Technologies Inc. View warranty, patent and trademark information at fotec.com.tr/legal ©2022 Fotec Solar Technologies. All rights reserved. Fotec Energy Technologies